



MTRJ CONNECTOR

Features


- TIA/EIA 568-A compliant
- Precision molded MT ferrule
- Duplex ferrule -Plug-jack (RJ-45) design
- Polishing does not require diamond film
- High precision guide pins for exact alignment

Application

- CATV, and Multimedia
- Active device interface
- Telecommunication networks
- Data processing networks
- Industrial and medical
- Premise installations
- Optical switch interframe connection
- Asynchronous Transmission Mode (ATM)
- Gigabit Ethernet -Interconnection for O/E modules

AVAILABILITY

- MT-RJ male connector
- MT-RJ female connector

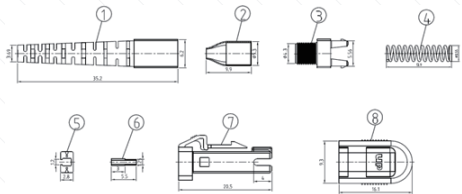

Specification

Item	Single Mode	Multimode
Insertion Loss	<0.5dB	<0.3dB
Return Loss	≥45dB(PC)	
Durability	<0.1dB typical change, 200 matings	
Operating Temperature	-40°C ~ 85°C	-40°C ~ 85°C
Ferrule Hole Sizes	126.0+1/-0μm	127 ±1μm